
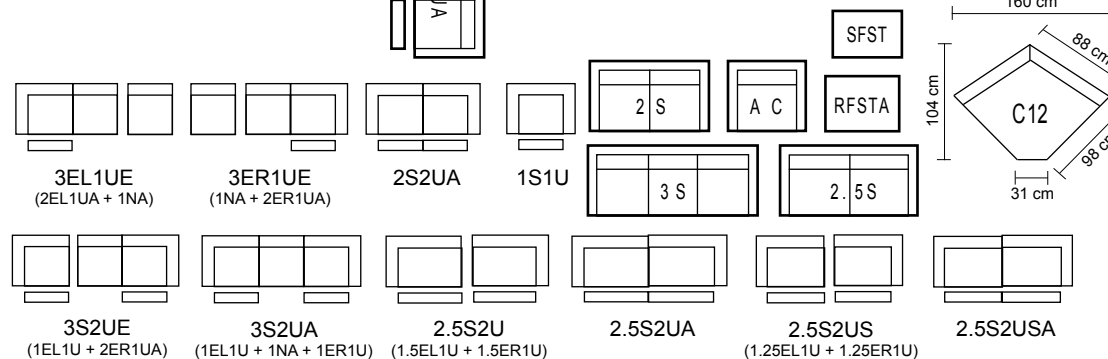
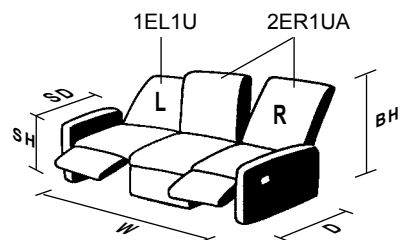











RS - 11916 - PRCS

COMBINATIONS



CONSTRUCTION

- SEAT : No-sag Spring
- BACK REST : Rubber Webbing
- SEAT CUSHION : D/32 + D/22
- BACK REST CUSHION : 100%Loose Fibre
- SOFA LEGS (front & rear) :
 - code : PLG-004-01L / PLG-068-01L / PLG-071-01L
 - material : Plastic
 - height : 15mm (PLG-004-01L)
50mm (PLG-068-01L)
45mm (PLG-071-01L)
 - colour : 01 = Black

* Available in ELECTRIC with USB Port (U) Version

RS - 11916 - PRCS

DIMENSION

Configuration	Width		Depth		Seat Depth		Back Height		Seat Height		Weight		Volume	
	cm	inch	cm	inch	cm	inch	cm	inch	cm	inch	kg	lb	m ³	ft ³
3S2UE, 3S2UA	231	91	100 - 166	39 - 65	56	22	98	39	48	19	119	263	2.26	79.95
2.5S2U, 2.5S2UA	212	83	100 - 166	39 - 65	56	22	98	39	48	19	116	256	2.08	73.37
2.5S2US, 2.5S2USA	202	80	100 - 166	39 - 65	56	22	98	39	48	19	112	247	1.98	69.91
2S2UA	172	68	100 - 166	39 - 65	56	22	98	39	48	19	100	221	1.69	59.53
1S1U	112	44	100 - 166	39 - 65	56	22	98	39	48	19	53	117	1.10	38.76
3EL1UE, 3ER1UE	204	80	100 - 166	39 - 65	56	22	98	39	48	19	88	194	2.00	70.60
2EL1UA, 2ER1UA	145	57	100 - 166	39 - 65	56	22	98	39	48	19	69	152	1.42	50.18
1.5EL1U, 1.5ER1U	106	42	100 - 166	39 - 65	56	22	98	39	48	19	58	128	1.04	36.68
1.25EL1U, 1.25ER1U	101	40	100 - 166	39 - 65	56	22	98	39	48	19	56	124	0.99	34.95
1EL1U, 1ER1U	86	34	100 - 166	39 - 65	56	22	98	39	48	19	50	111	0.84	29.76
1.25NA1V	75	30	100 - 166	39 - 65	56	22	98	39	48	19	48	106	0.74	25.96
1NA1VS	57	22	100 - 166	39 - 65	56	22	98	39	48	19	27	60	0.56	19.73
1.25NA	74	29	100	39	56	22	98	39	48	19	22	49	0.73	25.61
1NA	59	23	100	39	56	22	98	39	48	19	19	42	0.58	20.42
3EL, 3ER	206	81	100	39	56	22	98	39	48	19	70	155	2.02	71.29
2EL, 2ER	146	57	100	39	56	22	98	39	48	19	50	111	1.43	50.53
1EL, 1ER	86	34	100	39	56	22	98	39	48	19	30	67	0.84	29.76
1.25COUL, 1.25COUR	101	40	160	63	117	46	98	39	48	19	48	106	1.58	55.93
1.25COULABU, 1.25COURABU	101	40	160 - 188	63 - 74	117	46	98	39	48	19	55	122	1.58	55.93
C12	117	46	117	46	-	-	98	39	48	19	31	69	1.34	47.38
STA	32	13	100	39	-	-	98	39	-	-	14	31	0.31	11.07
STA-2USB	32	13	100	39	-	-	98	39	-	-	14	31	0.31	11.07
3S	229	90	100	39	56	22	98	39	48	19	80	177	2.24	79.25
2.5S	212	83	100	39	56	22	98	39	48	19	74	163	2.08	73.37
2S	172	68	100	39	56	22	98	39	48	19	60	133	1.69	59.53
AC	112	44	100	39	56	22	98	39	48	19	40	89	1.10	38.76
RFSTA	80	31	55	22	-	-	-	-	45	18	13	29	0.20	6.99
SFST	65	26	58	23	-	-	-	-	47	19	12	27	0.18	6.26